


### US TYPE FORGED PEAR SHAPED LINK

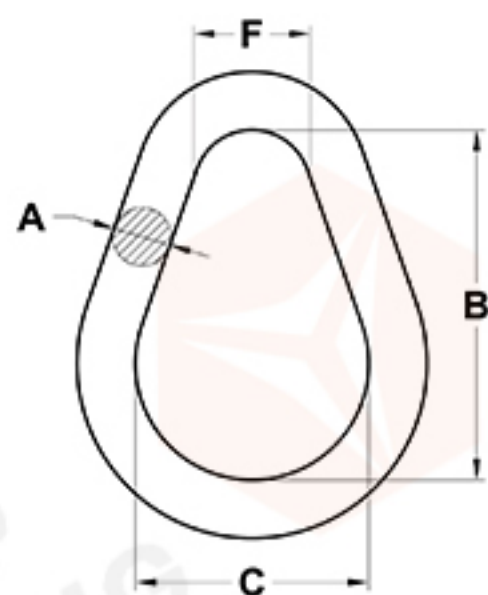

YXR1028

ITEM NO.	SIZE (A) (IN.)	WORKING LOAD LIMIT			WEIGHT (LBS.)	DIMENSIONS (IN.)		
		CARBON (LBS.)	ALLOY (LBS.)	ALLOY (T)		B	C	F
YXR1028-01	1/2	2900	7000	3.15	0.55	3.00	2.00	1.00
YXR1028-02	5/8	4200	9000	4.09	1.10	3.75	2.50	1.25
YXR1028-03	3/4	6000	12300	5.59	1.76	4.50	3.00	1.50
YXR1028-04	7/8	8300	15000	6.81	2.82	5.25	3.50	1.75
YXR1028-05	1	10800	24360	11.0	4.22	6.00	4.00	2.00
YXR1028-06	1-1/8	13800	30600	13.9	6.25	6.50	4.50	2.25
YXR1028-07	1-1/4	16750	36000	16.4	8.25	7.75	5.00	2.50
YXR1028-08	1-3/8	20500	43000	19.5	11.25	8.25	5.50	2.75
YXR1028-09	1-1/2	-	54300	24.7	14.25	9.00	6.00	3.00
YXR1028-10	1-5/8	-	62600	28.4	18.50	9.75	6.50	3.25
YXR1028-11	1-3/4	-	84900	38.6	22.50	10.50	7.00	3.50
YXR1028-12	1-7/8	-	95800	43.5	29.00	11.25	7.50	3.75
YXR1028-13	2	-	102600	46.6	34.00	12.00	8.00	4.00
YXR1028-14	2-1/4	-	143100	65.0	48.00	13.50	9.00	4.50
YXR1028-15	2-1/2	-	147300	66.9	66.00	15.00	10.00	5.00
YXR1028-16	2-3/4	-	216900	98.6	88.00	16.50	11.00	5.50
YXR1028-17	3	-	228000	103	114.00	18.00	12.00	6.00
YXR1028-18	3-1/4	-	262000	119	146.00	19.50	13.00	6.50
YXR1028-19	3-1/2	-	279000	126	181.00	21.00	14.00	7.00
YXR1028-20	4	-	373000	169	271.00	24.00	16.00	8.00

◆ Ultimate Load at 4 Times the Working Load Limit.